


DOOR NUMBER	QTY	OPENING WIDTH	OPENING HEIGHT	ACTUAL WIDTH	ACTUAL HEIGHT	MODEL	JAMB W/S	MOUNTING ANGLE/BKRT	LOOK	PANELS WIDE	PANELS HIGH	SECTION NUMBER OPEN FOR GLASS								
												1	2	3	4	5	6	7	8	

JOB:	
DISTR:	
CONTR:	
ARCH:	
	NR: 2902459



ALUMAVIEW STANDARD

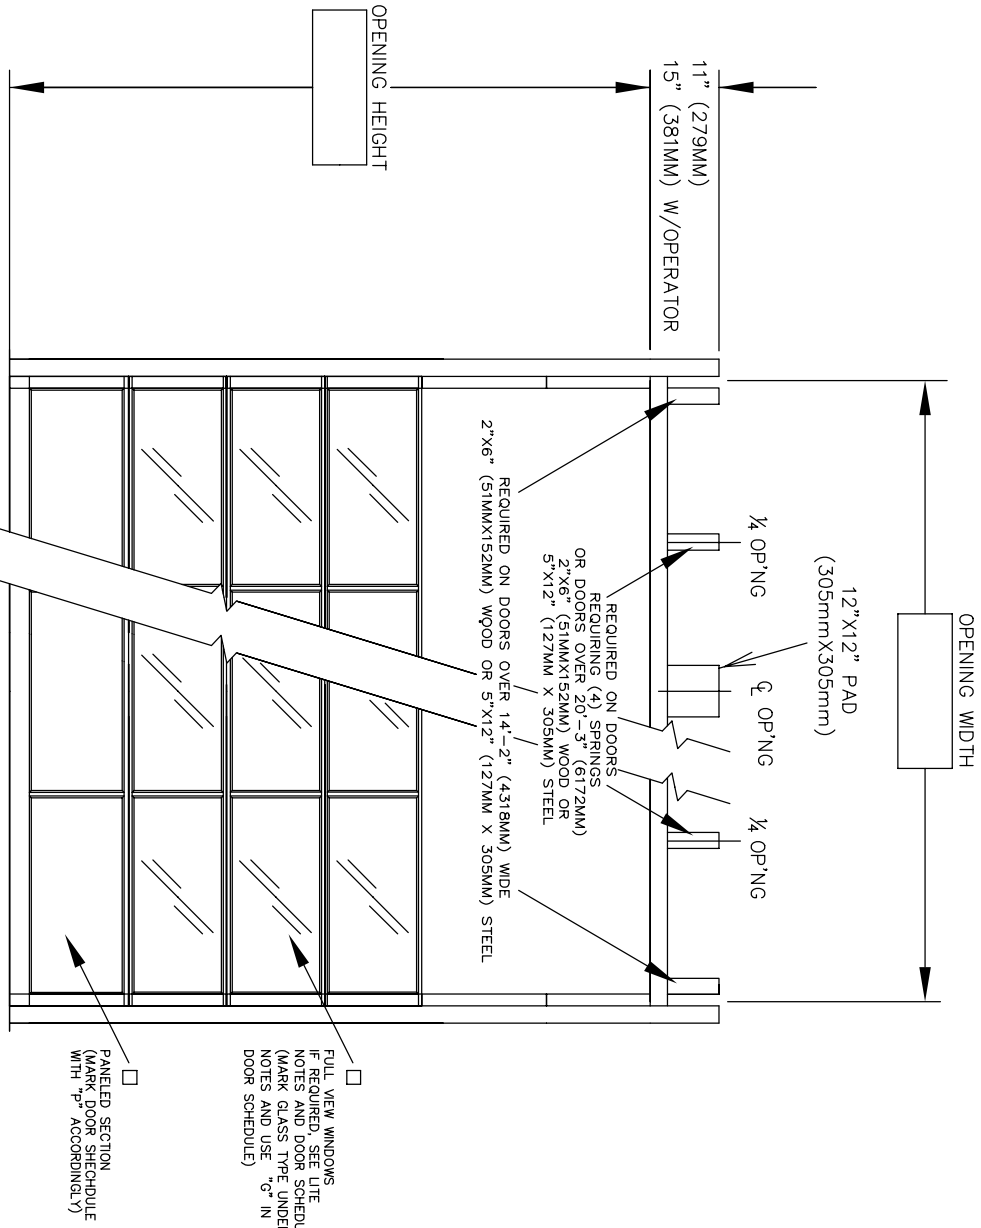

1) DOORS SHALL BE RAYNOR SECTIONAL OVERHEAD TYPE ALUMAVIEW STANDARD TYPE AS MANUFACTURED BY RAYNOR GARAGE DOOR CO. SECTIONS SHALL BE 1-3/4" (44.4mm) THICK 6063T6 ALUMINUM ALLOY FRAME WITH .050" (1.3mm) THICK ALUMINUM PANELS. STILES AND RAILS TO BE JOINED TOGETHER WITH 1/4" (6.4mm) RAYNOR STILES AND RAILS TO BE STAINED WITH POLYURETHANE. BOTTOM/TOP RAILS TO BE 2-5/8" (66.7mm) OR 4-5/8" (117.5mm) COMBINED DIMENSION OF THE TWO MEETING INTERMEDIATE RAILS TO BE 1-1/2" (38.1mm). END STILES SHALL BE 2-5/8" (66.7mm). ENCLOSED TYPE IN LIEU OF OPEN END TYPE. INTERMEDIATE RAILS TO HAVE INTEGRAL REINFORCED WEB T-3X8 (25.9MM) DEEP BOTTOM FLANGE EXPUSIONS AND PANELS TO BE FINISHED AND CLEAR ANODIZED TO MEET SPEC. 204RT SPECIAL ANODIZED FINISHES OR ARMORBRITE COLORS AVAILABLE.


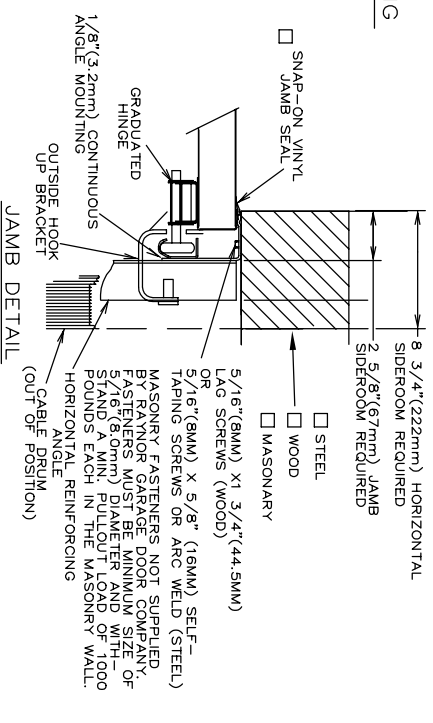
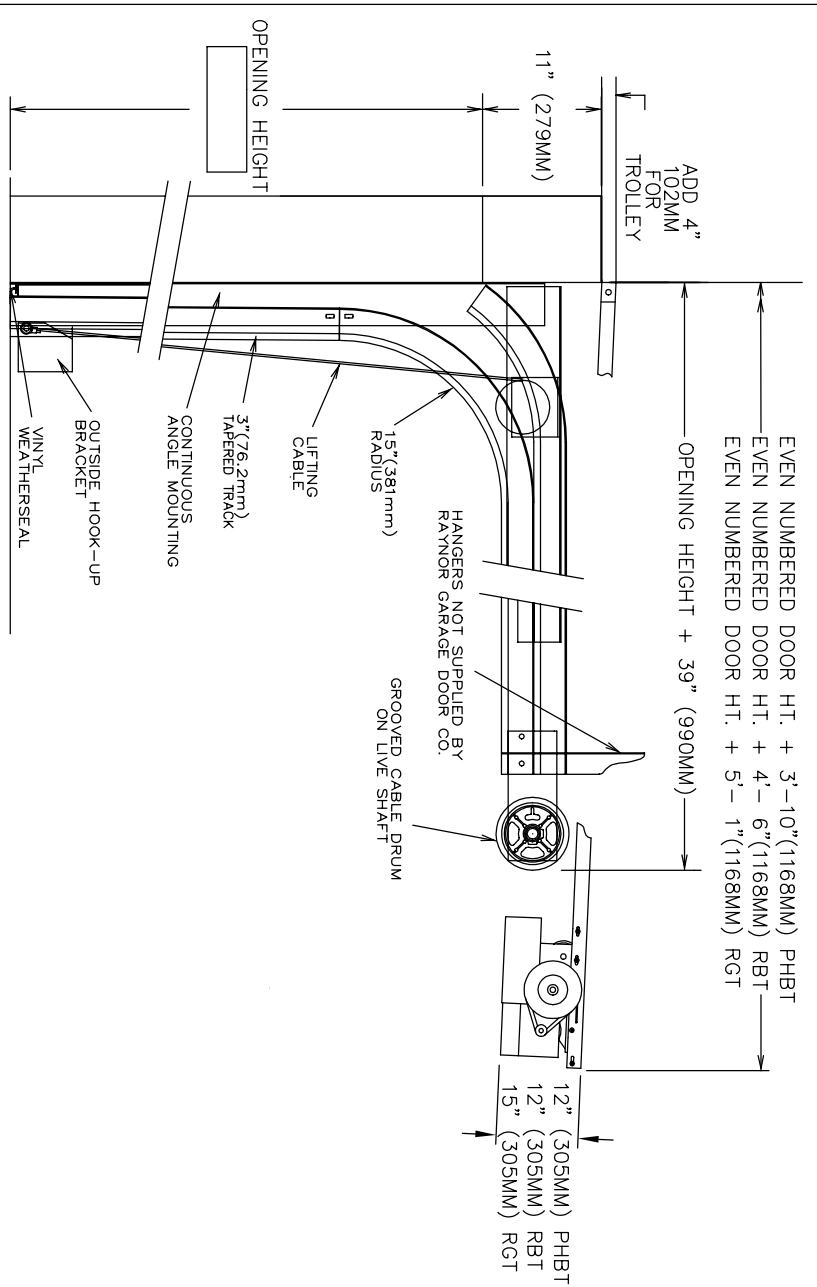
- GLASS (CLEAR) _____ (DSB 3/16"(4.8MM) OR DSB 1/4" (6.4MM))
- GLASS (WIRE) _____ (DSB 3/16"(4.8MM) OR DSB 1/4" (6.4MM))
- GLASS (TEMPERED) _____ (1/8"(3.2MM), 3/16"(4.8MM) OR 1/4" (6.4MM))
- PLEXIGLASS _____ (1/8"(3.2MM) OR 1/4" (6.4MM))
- LEXAN _____ (1/8"(3.2MM) OR 1/4" (6.4MM))
- LOCKING - CREMONE TYPE BOLT ENGAGES SLOT IN TRACK, _____ HAND SIDE. FIVE PIN TUMBLER CYLINDER OUTSIDE - NIGHT LATCH INSIDE.
- LOCKING - SPRING LOADED SLIDE BOLT ENGAGES SLOT IN TRACK. OPERABLE FROM INSIDE ONLY - MAY BE MOUNTED EITHER SIDE
- LOCKING - OMIT LOCK.
- LOCKS SHOULD NOT BE SUPPLIED WITH AN ELECTRIC OPERATED DOOR WITHOUT A LOCK INTERLOCK SWITCH.



DOOR NUMBER	QTY	OPENING		ACTUAL		MODEL	JAMB MOUNTING		LOCK	PANELS		SECTION NUMBER OPEN FOR GLASS																											
		WIDTH	HEIGHT	WIDTH	HEIGHT		W	S		ANGLE	PKT	WIDE	HIGH	1	2	3	4	5	6	7	8																		

JOB: _____
 CONTR: _____
 ARCH: _____

NR: 2902459

TRACKS- 3" (76.2mm) HOT-DIPPED GALVANIZED TRACK PER ASTM A-653 TR-1 BE CONTINUOUS UNINTERRUPTED THROUGHOUT THE ENTIRE LENGTH OF THE DOOR TO THE JAMB. CONTINUOUS ANGLE SIZE TO BE NO LESS THAN 3-1/2"x6"x1/8" (88.9mmx152mmx3.2mm), TO BE WELDED TO JAMB AND ADEQUATELY REINFORCED WITH CONTINUOUS ANGLE.

HARDWARE- HINGES AND BRACKETS MADE FROM GALVANIZED STEEL TRACK ROLLERS SHALL HAVE TEN 5/16" (7.9mm) DIAMETER HANDHELD STEEL BALLS PER ROLLER.

SPRINGS- HEAVY DUTY OIL-TEMPERED WIRE TORSION SPRINGS ON A CONTINUOUS BALL BEARING CROSS-HEADER SHAFT GALVANIZED AIRCRAFT TYPE LIFTING CABLES WITH MIN. SAFETY FACTOR OF 5 TO 1.

ANSI/UL325 REQUIRES THE MOTOR OPERATOR BE MOUNTED A MINIMUM OF 8' ABOVE THE FLOOR OR GUARDING OF THE MOTOR OPERATOR TO PREVENT INJURY.(GUARDS BY OTHERS).

- RAYNOR POWERHOIST BASIC (PHBT) 1/2 H.P., 115 VOLT, SINGLE PHASE
- RAYNOR POWERHOIST STANDARD (RBT) _____ H.P., _____ VOLT, _____ PHASE
- RAYNOR POWERHOIST OPTIMA (RGT) _____ H.P., _____ VOLT, _____ PHASE
- WIRING TYPE-SR2 WIRING. MOMENTARY CONTACT OPEN/CLOSE/STOP. SAFETY EDGE TO REVERSE.
- WIRING TYPE-SPECIAL (NOT AVAILABLE WITH PHBT OPERATORS)
- SPECIFY SPECIAL WIRING TYPE _____
- PNEUMATIC SAFETY EDGE TO REVERSE COIL CORD OR
- ELECTRIC SAFETY EDGE TO REVERSE CABLE TAKE UP REEL
- THRU-BEAM PHOTO EYES